查询TK71315供应商

LOW DROPOUT REGULATOR

FEATURES

- **Low Dropout Voltage**
- **Low Quiescent Current**
- **Very Stable Output**
- **Active Low On/Off Control**
- **Miniature Package (SOT-25)**

APPLICATIONS

- **Battery Powered Systems**
- **Portable Consumer Equipment**
- **Cordless Telephones**
- **Personal Communications Equipment**
- **Radio Control Systems**
- **Toys**
- **Low Voltage Systems**

DESCRIPTION

TK713xx is a low dropout, linear regulator with a built-in electronic switch. Since a PNP power transistor is used, dropout voltage is very low, making it possible to maintain a stable output voltage even as the battery voltage decreases. This allows longer battery life. The TK713xx has a control pin to turn the output on or off. The input current is 10 µA when the output is off.

The TK713xx is available in a miniature SOT-25 surface mount package.

TK713xx



ORDERING INFORMATION

TK713 □□M □□

Tape/Reel Code

VoltageCode

VOLTAGE CODE

15 = 1.5 V	33 = 3.3 V
20 = 2.0 V	40 = 4.0 V
25 = 2.5 V	45 = 4.5 V
28 = 2.8 V	50 = 5.0 V
30 = 3.0 V	

TAPE/REEL CODE
TL: Tape Left

BLOCK DIAGRAM

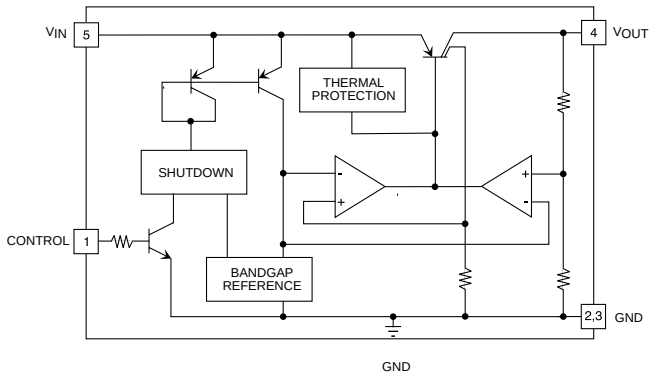

ABSOLUTE MAXIMUM RATINGS

Input Voltage ..... 15 V
Power Dissipation (Note 1) ..... 350 mW
Operating Voltage Range ..... 1.4 to 14 V
Junction Temperature ..... 150 °C
Storage Temperature Range ..... -55 to +150 °C
Operating Temperature Range ..... -30 to +80 °C
Lead Soldering Temperature (10 s) ..... 235 °C

TK71315 ELECTRICAL CHARACTERISTICS

Test Conditions: V_{IN} = 1.8 V, T_A = 25 °C, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_Q	Quiescent Current	V_{IN} = 1.8 V, I_{OUT} = 0 mA		150	300	µA
		V_{IN} = 1.3 V, I_{OUT} = 0 mA		2.0	5.0	mA
I_{STBY}	Standby Current	V_{IN} = 3.0 V, Output OFF		12	40	µA
V_{OUT}	Regulated Output Voltage	V_{IN} = 1.8 V, I_{OUT} = 10 mA	1.42	1.5	1.58	V
V_{DROP}	Dropout Voltage	I_{OUT} = 30 mA		100	250	mV
I_{OUT}	Output Current		40	60		mA
I_{GND}	Ground Current	V_{IN} = 1.8 V, I_{OUT} = 30 mA		1.5	3.5	mA
Line Reg	Line Regulation	V_{IN} = 1.8 to 6.0 V		0.9	1.5	mV
Load Reg	Load Regulation	I_{OUT} = 1 to 30 mA		15	40	mV
RR	Ripple Rejection	C_L = 3.3 µF, f = 400 Hz, I_{OUT} = 10 mA		66		dB
$\Delta V_{OUT}/\Delta T$	Temperature Coefficient			0.1		mV/° C
CONTROL TERMINAL SPECIFICATIONS						
I_{CONT}	Control Current	V_{CONT} = 1.0 V, R_{CONT} = 0 Ω, Output OFF		43	60	µA
		V_{CONT} = 1.2 V, R_{CONT} = 100 KΩ, Output OFF		4.5		µA
$V_{CONT(ON)}$	Control Voltage ON	R_{CONT} = 100 KΩ, Output ON			0.4	V
$V_{CONT(OFF)}$	Control Voltage OFF	R_{CONT} = 100 KΩ, Output OFF	1.2			V

Note 1: Power dissipation is 350 mW when mounted as recommended. Derate at 2.8 mW/°C for operation above 25 °C. Power dissipation is 150 mW in Free Air. Derate at 1.2 mW/°C for operation above 25 °C.

TK71320 ELECTRICAL CHARACTERISTICS

Test Conditions: V_{IN} = 3.0 V, T_A = 25 °C, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_Q	Quiescent Current	V_{IN} = 3.0 V, I_{OUT} = 0 mA		130	300	µA
		V_{IN} = 1.9 V, I_{OUT} = 0 mA		1.4	3.0	mA
I_{STBY}	Standby Current	V_{IN} = 8.0 V, Output OFF		12	40	µA
V_{OUT}	Regulated Output Voltage	V_{IN} = 3.0 V, I_{OUT} = 10 mA	1.9	2.0	2.1	V
V_{DROP}	Dropout Voltage	I_{OUT} = 30 mA		100	200	mV
I_{OUT}	Output Current		100	160		mA
I_{GND}	Ground Current	V_{IN} = 3.0 V, I_{OUT} = 30 mA		1.5	3.5	mA
Line Reg	Line Regulation	V_{IN} = 3.0 to 13.5 V		10	30	mV
Load Reg	Load Regulation	I_{OUT} = 1 to 60 mA		20	40	mV
RR	Ripple Rejection	C_L = 3.3 µF, f = 400 Hz, I_{OUT} = 10 mA		63		dB
$\Delta V_{OUT}/\Delta T$	Temperature Coefficient			0.15		mV/° C
CONTROL TERMINAL SPECIFICATIONS						
I_{CONT}	Control Current	V_{CONT} = 1.0 V, R_{CONT} = 0 Ω, Output OFF		43	60	µA
		V_{CONT} = 1.2 V, R_{CONT} = 100 KΩ, Output OFF		4.5		µA
$V_{CONT(ON)}$	Control Voltage ON	R_{CONT} = 100 KΩ, Output ON			0.4	V
$V_{CONT(OFF)}$	Control Voltage OFF	R_{CONT} = 100 KΩ, Output OFF	1.2			V

TK71325 ELECTRICAL CHARACTERISTICS

Test Conditions: V_{IN} = 3.5 V, T_A = 25 °C, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_Q	Quiescent Current	V_{IN} = 3.5 V, I_{OUT} = 0 mA		130	300	µA
		V_{IN} = 2.0 V, I_{OUT} = 0 mA		1.4	3.0	mA
I_{STBY}	Standby Current	V_{IN} = 8.0 V, Output OFF		12	40	µA
V_{OUT}	Regulated Output Voltage	V_{IN} = 3.5 V, I_{OUT} = 10 mA	2.4	2.5	2.6	V
V_{DROP}	Dropout Voltage	I_{OUT} = 30 mA		100	200	mV
I_{OUT}	Output Current		100	160		mA
I_{GND}	Ground Current	V_{IN} = 3.5 V, I_{OUT} = 30 mA		1.5	3.5	mA
Line Reg	Line Regulation	V_{IN} = 3.5 to 13.5 V		10	30	mV
Load Reg	Load Regulation	I_{OUT} = 1 to 60 mA		20	40	mV
RR	Ripple Rejection	C_L = 3.3 µF, f = 400 Hz, I_{OUT} = 10 mA		63		dB
$\Delta V_{OUT}/\Delta T$	Temperature Coefficient			0.15		mV/° C
CONTROL TERMINAL SPECIFICATIONS						
I_{CONT}	Control Current	V_{CONT} = 1.0 V, R_{CONT} = 0 Ω, Output OFF		43	60	µA
		V_{CONT} = 1.2 V, R_{CONT} = 100 KΩ, Output OFF		4.5		µA
$V_{CONT(ON)}$	Control Voltage ON	R_{CONT} = 100 KΩ, Output ON			0.4	V
$V_{CONT(OFF)}$	Control Voltage OFF	R_{CONT} = 100 KΩ, Output OFF	1.2			V

TK71328 ELECTRICAL CHARACTERISTICS

Test Conditions: V_{IN} = 3.8 V, T_A = 25 °C, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_Q	Quiescent Current	V_{IN} = 3.8 V, I_{OUT} = 0 mA		130	300	µA
		V_{IN} = 2.5 V, I_{OUT} = 0 mA		1.4	3.0	mA
I_{STBY}	Standby Current	V_{IN} = 8.0 V, Output OFF		12	40	µA
V_{OUT}	Regulated Output Voltage	V_{IN} = 3.8 V, I_{OUT} = 10 mA	2.7	2.8	2.9	V
V_{DROP}	Dropout Voltage	I_{OUT} = 30 mA		100	200	mV
I_{OUT}	Output Current		100	160		mA
I_{GND}	Ground Current	V_{IN} = 3.8 V, I_{OUT} = 30 mA		1.5	3.5	mA
Line Reg	Line Regulation	V_{IN} = 3.8 to 13.8 V		10	30	mV
Load Reg	Load Regulation	I_{OUT} = 1 to 60 mA		20	40	mV
RR	Ripple Rejection	C_L = 3.3 µF, f = 400 Hz, I_{OUT} = 10 mA		63		dB
$\Delta V_{OUT}/\Delta T$	Temperature Coefficient			0.18		mV/° C
CONTROL TERMINAL SPECIFICATIONS						
I_{CONT}	Control Current	V_{CONT} = 1.0 V, R_{CONT} = 0 Ω, Output OFF		43	60	µA
		V_{CONT} = 1.2 V, R_{CONT} = 100 KΩ, Output OFF		4.5		µA
$V_{CONT(ON)}$	Control Voltage ON	R_{CONT} = 100 KΩ, Output ON			0.4	V
$V_{CONT(OFF)}$	Control Voltage OFF	R_{CONT} = 100 KΩ, Output OFF	1.2			V

TK71330 ELECTRICAL CHARACTERISTICS

Test Conditions: V_{IN} = 4.0 V, T_A = 25 °C, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_Q	Quiescent Current	V_{IN} = 4.0 V, I_{OUT} = 0 mA		130	300	µA
		V_{IN} = 2.5 V, I_{OUT} = 0 mA		1.4	3.0	mA
I_{STBY}	Standby Current	V_{IN} = 8.0 V, Output OFF		12	40	µA
V_{OUT}	Regulated Output Voltage	V_{IN} = 4.0 V, I_{OUT} = 10 mA	2.9	3.0	3.1	V
V_{DROP}	Dropout Voltage	I_{OUT} = 30 mA		100	200	mV
I_{OUT}	Output Current		100	160		mA
I_{GND}	Ground Current	V_{IN} = 4.0 V, I_{OUT} = 30 mA		1.5	3.5	mA
Line Reg	Line Regulation	V_{IN} = 4.0 to 14.0 V		10	30	mV
Load Reg	Load Regulation	I_{OUT} = 1 to 60 mA		20	40	mV
RR	Ripple Rejection	C_L = 3.3 µF, f = 400 Hz, I_{OUT} = 10 mA		63		dB
$\Delta V_{OUT}/\Delta T$	Temperature Coefficient			0.18		mV/° C
CONTROL TERMINAL SPECIFICATIONS						
I_{CONT}	Control Current	V_{CONT} = 1.0 V, R_{CONT} = 0 Ω, Output OFF		43	60	µA
		V_{CONT} = 1.2 V, R_{CONT} = 100 KΩ, Output OFF		4.5		µA
$V_{CONT(ON)}$	Control Voltage ON	R_{CONT} = 100 KΩ, Output ON			0.4	V
$V_{CONT(OFF)}$	Control Voltage OFF	R_{CONT} = 100 KΩ, Output OFF	1.2			V

TK71333 ELECTRICAL CHARACTERISTICS

Test Conditions: V_{IN} = 3.9 V, T_A = 25 °C, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_Q	Quiescent Current	V_{IN} = 3.9 V, I_{OUT} = 0 mA		130	300	µA
		V_{IN} = 2.8 V, I_{OUT} = 0 mA		1.4	3.0	mA
I_{STBY}	Standby Current	V_{IN} = 8.0 V, Output OFF		12	40	µA
V_{OUT}	Regulated Output Voltage	V_{IN} = 3.9 V, I_{OUT} = 10 mA	3.2	3.3	3.4	V
V_{DROP}	Dropout Voltage	I_{OUT} = 30 mA		100	200	mV
I_{OUT}	Output Current		100	160		mA
I_{GND}	Ground Current	V_{IN} = 3.9 V, I_{OUT} = 30 mA		1.5	3.5	mA
Line Reg	Line Regulation	V_{IN} = 3.9 to 14.0 V		10	30	mV
Load Reg	Load Regulation	I_{OUT} = 1 to 60 mA		20	40	mV
RR	Ripple Rejection	C_L = 3.3 µF, f = 400 Hz, I_{OUT} = 10 mA		63		dB
$\Delta V_{OUT}/\Delta T$	Temperature Coefficient			0.18		mV/° C
CONTROL TERMINAL SPECIFICATIONS						
I_{CONT}	Control Current	V_{CONT} = 1.0 V, R_{CONT} = 0 Ω, Output OFF		43	60	µA
		V_{CONT} = 1.2 V, R_{CONT} = 100 KΩ, Output OFF		4.5		µA
$V_{CONT(ON)}$	Control Voltage ON	R_{CONT} = 100 KΩ, Output ON			0.4	V
$V_{CONT(OFF)}$	Control Voltage OFF	R_{CONT} = 100 KΩ, Output OFF	1.2			V

TK71340 ELECTRICAL CHARACTERISTICS

Test Conditions: V_{IN} = 4.6 V, T_A = 25 °C, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_Q	Quiescent Current	V_{IN} = 4.6 V, I_{OUT} = 0 mA		130	300	µA
		V_{IN} = 3.5 V, I_{OUT} = 0 mA		1.4	3.0	mA
I_{STBY}	Standby Current	V_{IN} = 8.0 V, Output OFF		12	40	µA
V_{OUT}	Regulated Output Voltage	V_{IN} = 4.6 V, I_{OUT} = 10 mA	3.88	4.00	4.12	V
V_{DROP}	Dropout Voltage	I_{OUT} = 30 mA		100	200	mV
I_{OUT}	Output Current		100	160		mA
I_{GND}	Ground Current	V_{IN} = 4.6 V, I_{OUT} = 30 mA		1.5	3.5	mA
Line Reg	Line Regulation	V_{IN} = 4.6 to 14.0 V		10	30	mV
Load Reg	Load Regulation	I_{OUT} = 1 to 60 mA		20	40	mV
RR	Ripple Rejection	C_L = 3.3 µF, f = 400 Hz, I_{OUT} = 10 mA		63		dB
$\Delta V_{OUT}/\Delta T$	Temperature Coefficient			0.20		mV/° C
CONTROL TERMINAL SPECIFICATIONS						
I_{CONT}	Control Current	V_{CONT} = 1.0 V, R_{CONT} = 0 Ω, Output OFF		43	60	µA
		V_{CONT} = 1.2 V, R_{CONT} = 100 KΩ, Output OFF		4.5		µA
$V_{CONT(ON)}$	Control Voltage ON	R_{CONT} = 100 KΩ, Output ON			0.4	V
$V_{CONT(OFF)}$	Control Voltage OFF	R_{CONT} = 100 KΩ, Output OFF	1.2			V

TK71345 ELECTRICAL CHARACTERISTICS

Test Conditions: V_{IN} = 5.1 V, T_A = 25 °C, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_Q	Quiescent Current	V_{IN} = 5.1 V, I_{OUT} = 0 mA		130	300	µA
		V_{IN} = 4.0 V, I_{OUT} = 0 mA		1.4	3.0	mA
I_{STBY}	Standby Current	V_{IN} = 8.0 V, Output OFF		12	40	µA
V_{OUT}	Regulated Output Voltage	V_{IN} = 5.1 V, I_{OUT} = 10 mA	4.36	4.50	4.64	V
V_{DROP}	Dropout Voltage	I_{OUT} = 30 mA		100	200	mV
I_{OUT}	Output Current		100	160		mA
I_{GND}	Ground Current	V_{IN} = 5.1 V, I_{OUT} = 30 mA		1.5	3.5	mA
Line Reg	Line Regulation	V_{IN} = 5.1 to 14.0 V		10	30	mV
Load Reg	Load Regulation	I_{OUT} = 1 to 60 mA		20	40	mV
RR	Ripple Rejection	C_L = 3.3 µF, f = 400 Hz, I_{OUT} = 10 mA		63		dB
$\Delta V_{OUT}/\Delta T$	Temperature Coefficient			0.25		mV/° C
CONTROL TERMINAL SPECIFICATIONS						
I_{CONT}	Control Current	V_{CONT} = 1.0 V, R_{CONT} = 0 Ω, Output OFF		43	60	µA
		V_{CONT} = 1.2 V, R_{CONT} = 100 KΩ, Output OFF		4.5		µA
$V_{CONT(ON)}$	Control Voltage ON	R_{CONT} = 100 KΩ, Output ON			0.4	V
$V_{CONT(OFF)}$	Control Voltage OFF	R_{CONT} = 100 KΩ, Output OFF	1.2			V

TK71350 ELECTRICAL CHARACTERISTICS

Test Conditions: V_{IN} = 5.6 V, T_A = 25 °C, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_Q	Quiescent Current	V_{IN} = 5.6 V, I_{OUT} = 0 mA		130	300	µA
		V_{IN} = 4.0 V, I_{OUT} = 0 mA		1.4	3.0	mA
I_{STBY}	Standby Current	V_{IN} = 8.0 V, Output OFF		12	40	µA
V_{OUT}	Regulated Output Voltage	V_{IN} = 5.6 V, I_{OUT} = 10 mA	4.85	5.00	5.15	V
V_{DROP}	Dropout Voltage	I_{OUT} = 30 mA		100	200	mV
I_{OUT}	Output Current		100	160		mA
I_{GND}	Ground Current	V_{IN} = 5.6 V, I_{OUT} = 30 mA		1.5	3.5	mA
Line Reg	Line Regulation	V_{IN} = 5.6 to 14.0 V		10	30	mV
Load Reg	Load Regulation	I_{OUT} = 1 to 60 mA		20	40	mV
RR	Ripple Rejection	C_L = 3.3 µF, f = 400 Hz, I_{OUT} = 10 mA		63		dB
$\Delta V_{OUT}/\Delta T$	Temperature Coefficient			0.25		mV/° C
CONTROL TERMINAL SPECIFICATIONS						
I_{CONT}	Control Current	V_{CONT} = 1.0 V, R_{CONT} = 0 Ω, Output OFF		43	60	µA
		V_{CONT} = 1.2 V, R_{CONT} = 100 KΩ, Output OFF		4.5		µA
$V_{CONT(ON)}$	Control Voltage ON	R_{CONT} = 100 KΩ, Output ON			0.4	V
$V_{CONT(OFF)}$	Control Voltage OFF	R_{CONT} = 100 KΩ, Output OFF	1.2			V

TEST CIRCUIT

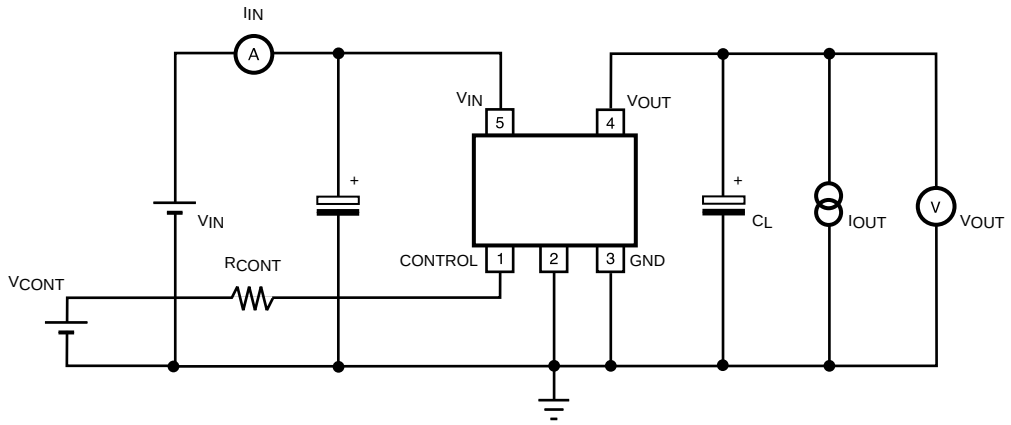

TYPICAL PERFORMANCE CHARACTERISTICS

T_A = 25 ° C, unless otherwise specified.

OUTPUT VOLTAGE vs. INPUT VOLTAGE

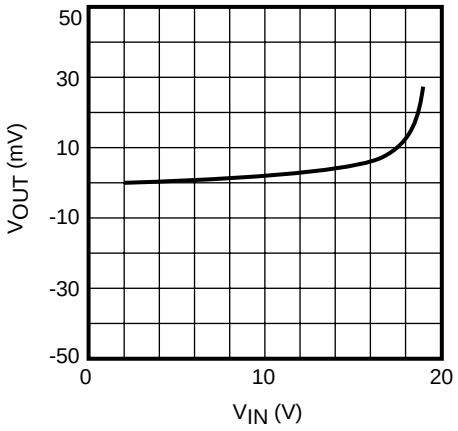

GROUND CURRENT vs. AMBIENT TEMPERATURE

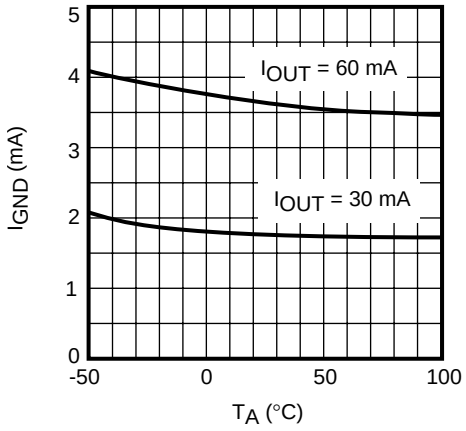

DROPOUT VOLTAGE vs. AMBIENT TEMPERATURE

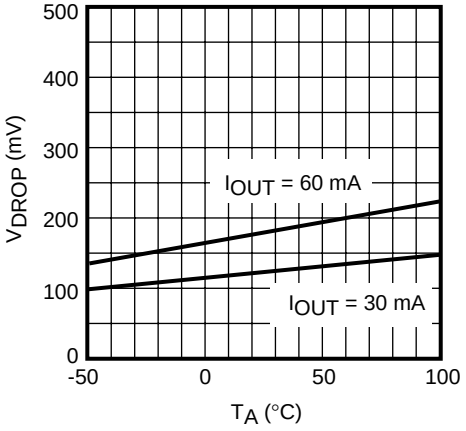

NOISE SPECTRUM

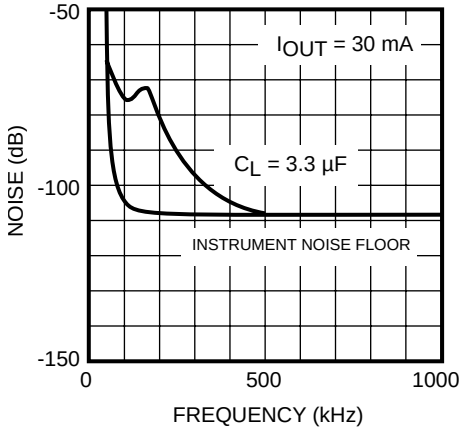

RIPPLE REJECTION vs. FREQUENCY

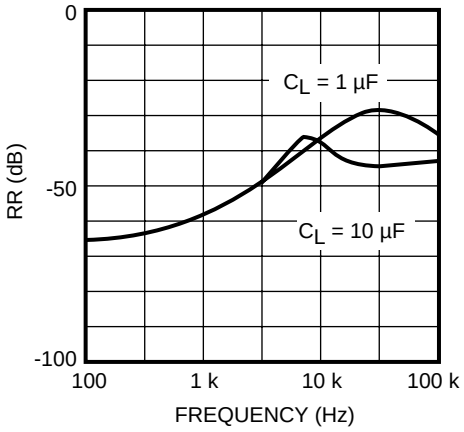

LINE TRANSIENT RESPONSE

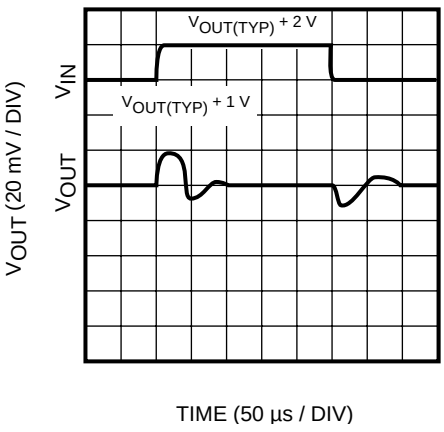

TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

T_A = 25 ° C, unless otherwise specified.

LOAD TRANSIENT RESPONSE

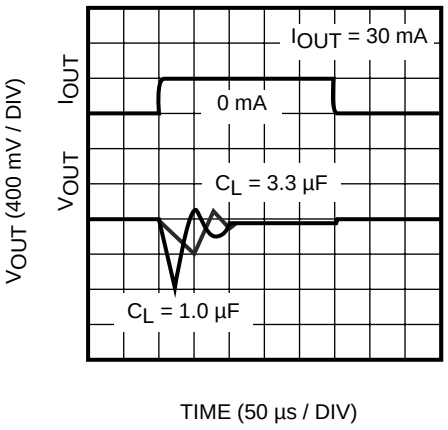

GROUND CURRENT vs. OUTPUT CURRENT

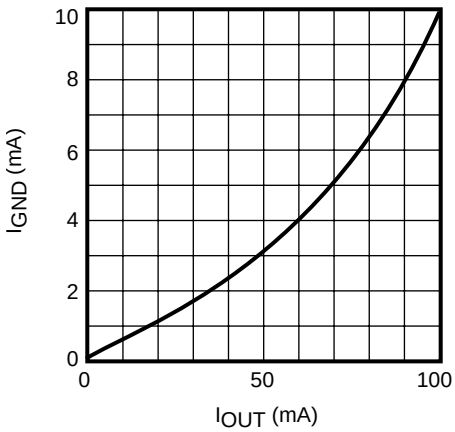

OUTPUT VOLTAGE vs. INPUT VOLTAGE

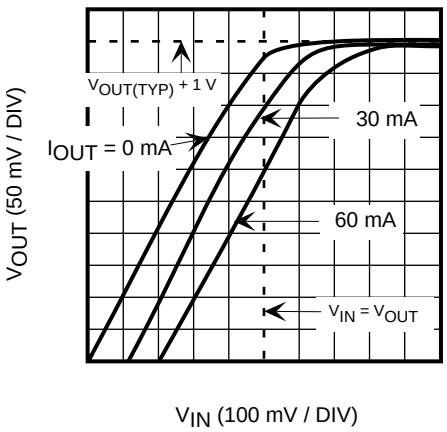

TK71315

OUTPUT VOLTAGE vs. OUTPUT CURRENT

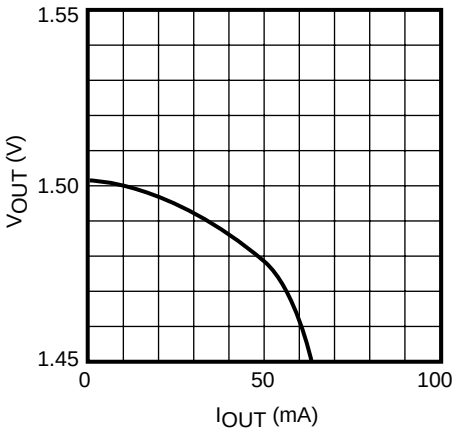

QUIESCENT CURRENT vs. INPUT VOLTAGE

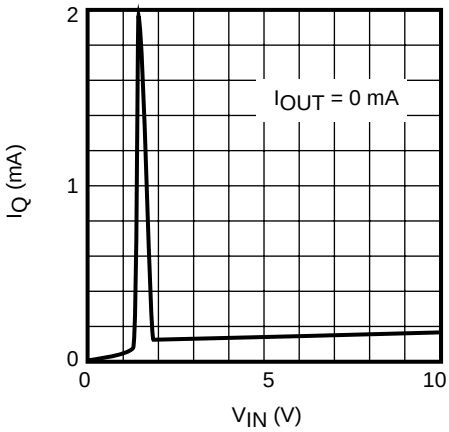

OUTPUT CURRENT vs. AMBIENT TEMPERATURE

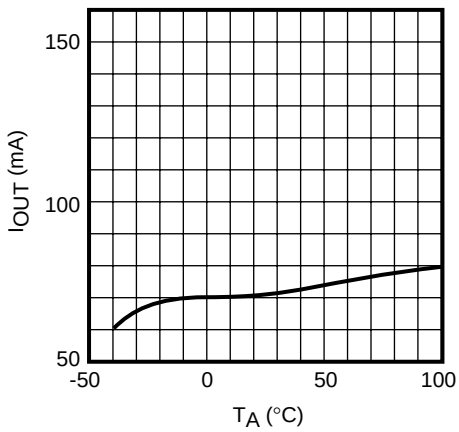

DROPOUT VOLTAGE vs. OUTPUT CURRENT

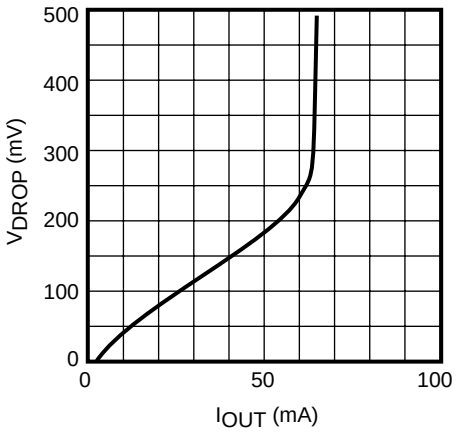

SHORT CIRCUIT PROTECTION

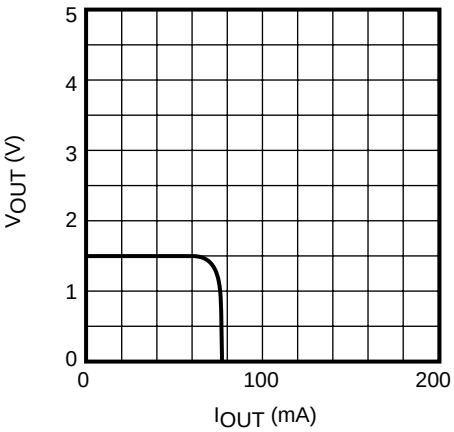

OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE

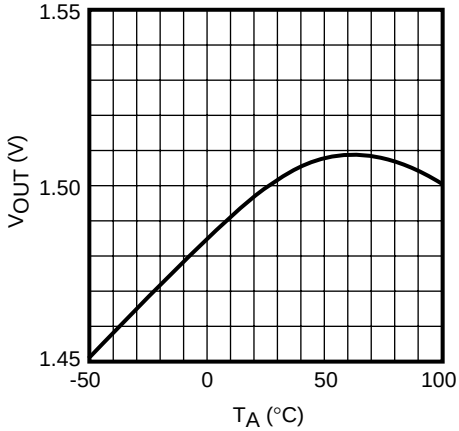

TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

T_A = 25 ° C, unless otherwise specified.

TK71320

OUTPUT VOLTAGE vs. OUTPUT CURRENT

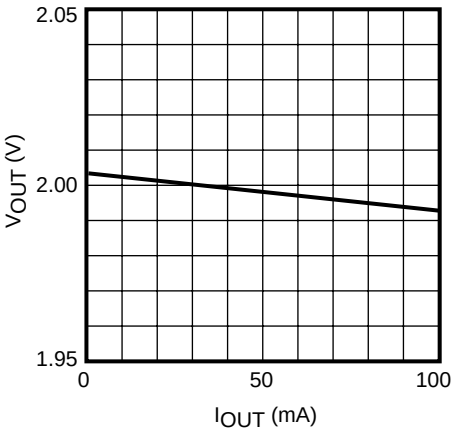

QUIESCENT CURRENT vs. INPUT VOLTAGE

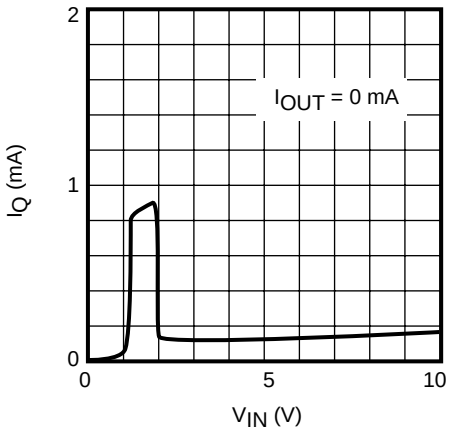

OUTPUT CURRENT vs. AMBIENT TEMPERATURE

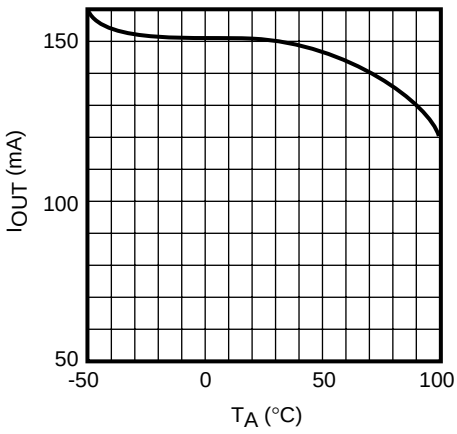

DROPOUT VOLTAGE vs. OUTPUT CURRENT

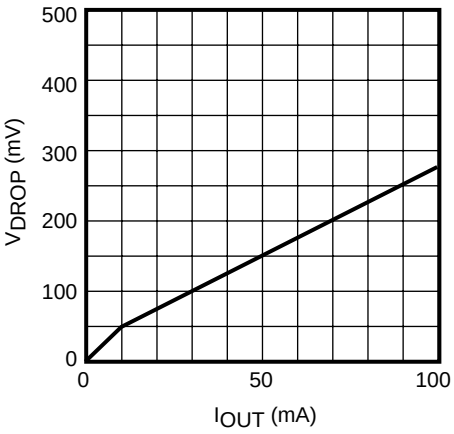

SHORT CIRCUIT PROTECTION

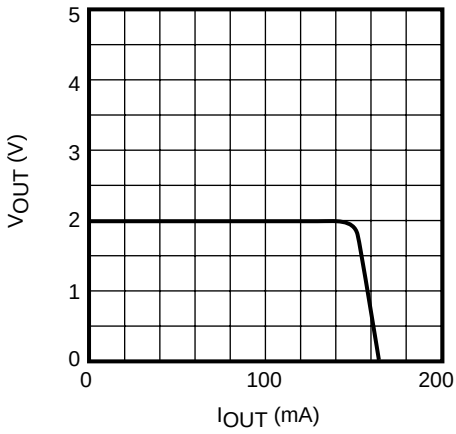

OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE

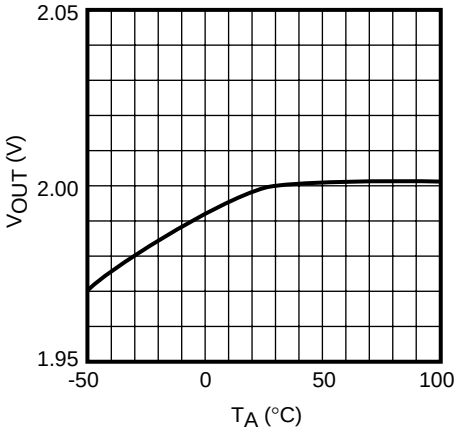

TK71325

OUTPUT VOLTAGE vs. OUTPUT CURRENT

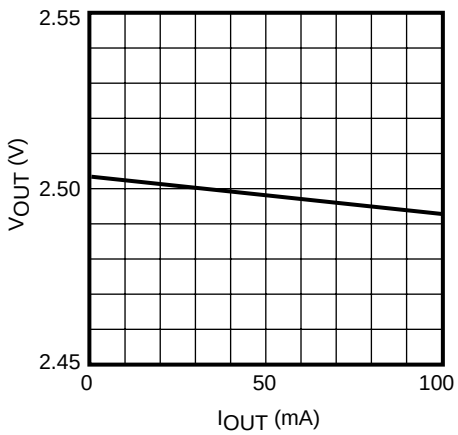

QUIESCENT CURRENT vs. INPUT VOLTAGE

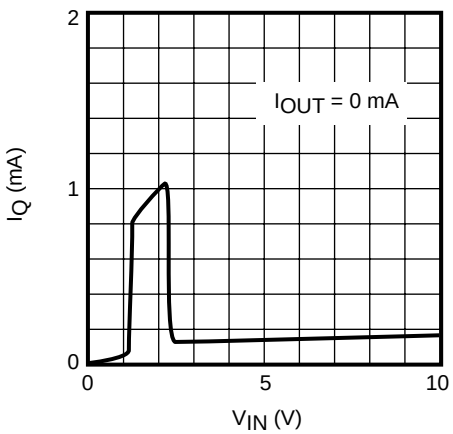

OUTPUT CURRENT vs. AMBIENT TEMPERATURE

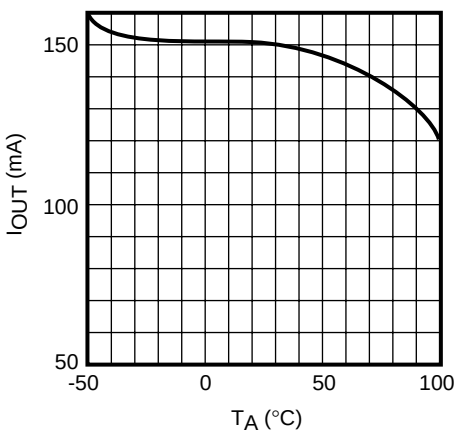

TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

T_A = 25 ° C, unless otherwise specified.

TK71325 (CONT.)

DROPOUT VOLTAGE vs. OUTPUT CURRENT

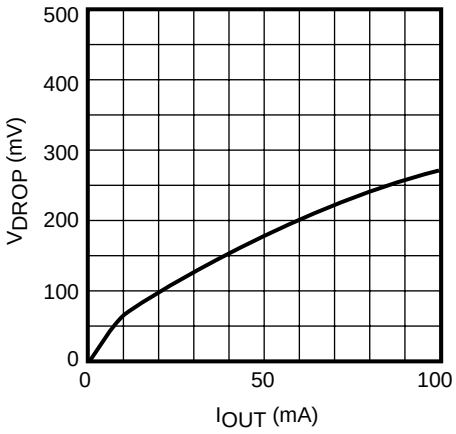

SHORT CIRCUIT PROTECTION

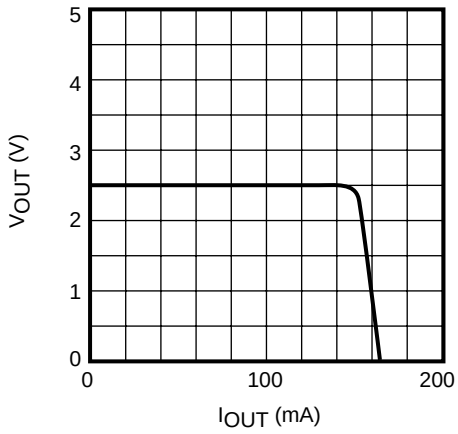

OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE

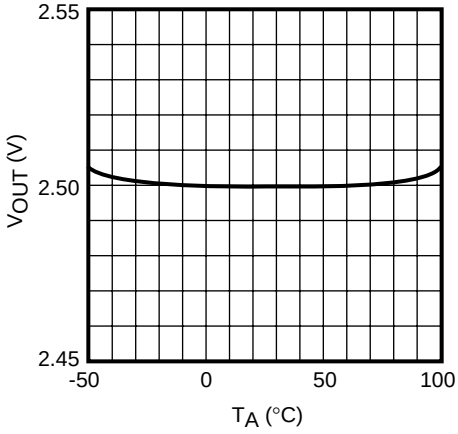

TK71330

OUTPUT VOLTAGE vs. OUTPUT CURRENT

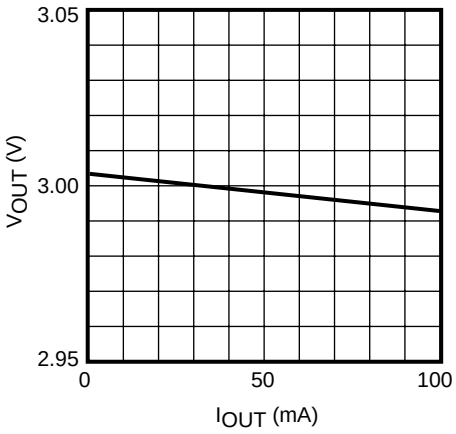

QUIESCENT CURRENT vs. INPUT VOLTAGE

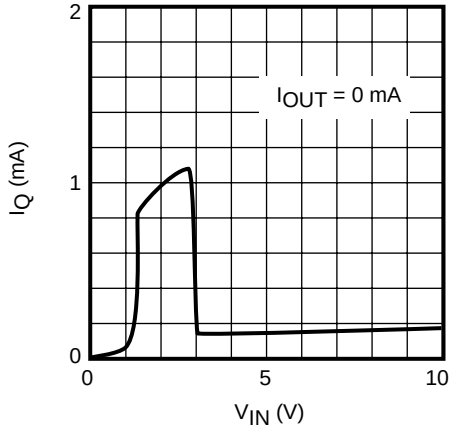

OUTPUT CURRENT vs. AMBIENT TEMPERATURE

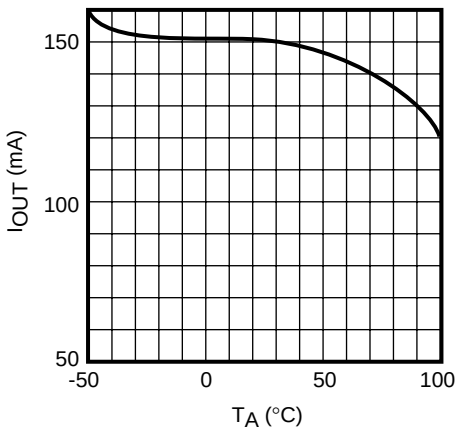

DROPOUT VOLTAGE vs. OUTPUT CURRENT

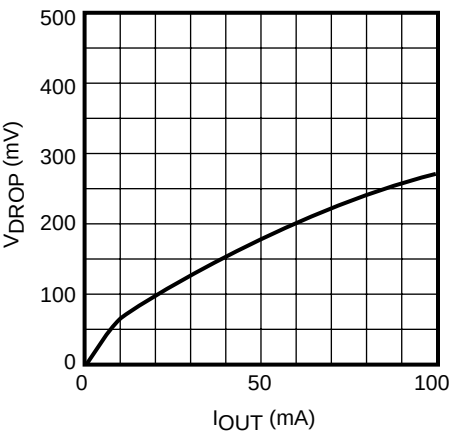

SHORT CIRCUIT PROTECTION

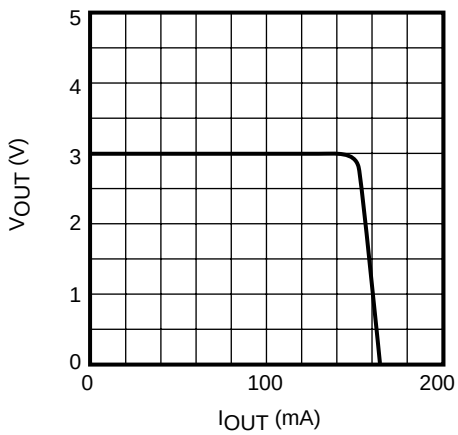

OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE

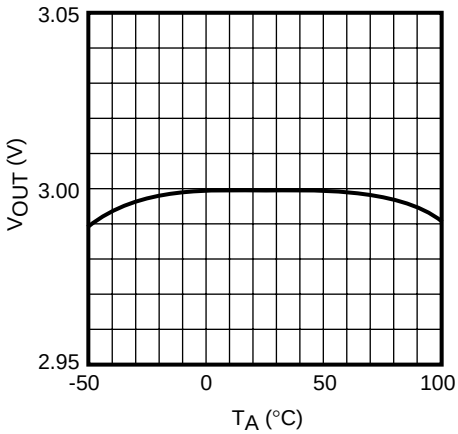

TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

T_A = 25 ° C, unless otherwise specified.

TK71333

OUTPUT VOLTAGE vs. OUTPUT CURRENT

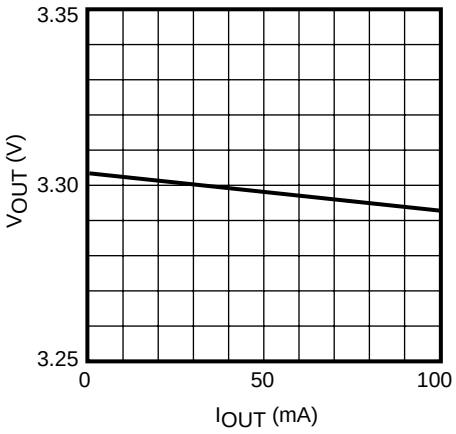

QUIESCENT CURRENT vs. INPUT VOLTAGE

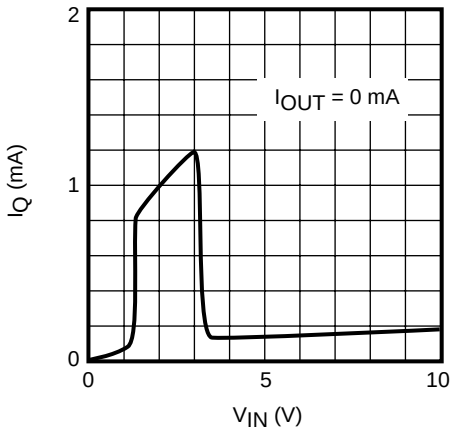

OUTPUT CURRENT vs. AMBIENT TEMPERATURE

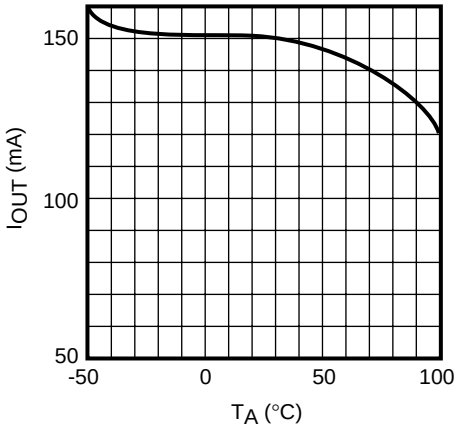

DROPOUT VOLTAGE vs. OUTPUT CURRENT

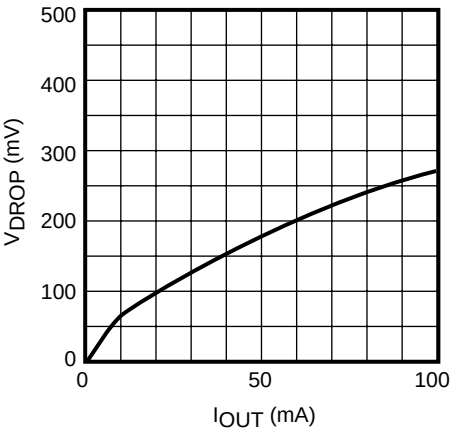

SHORT CIRCUIT PROTECTION

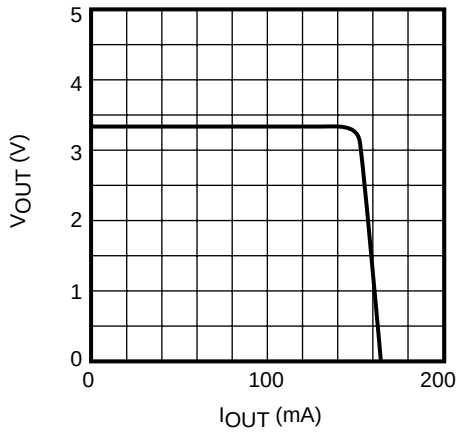

OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE

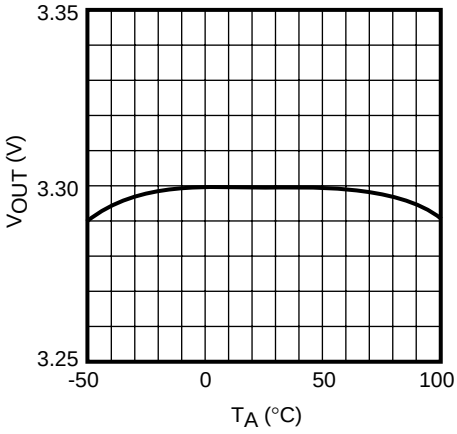

TK71335

OUTPUT VOLTAGE vs. OUTPUT CURRENT

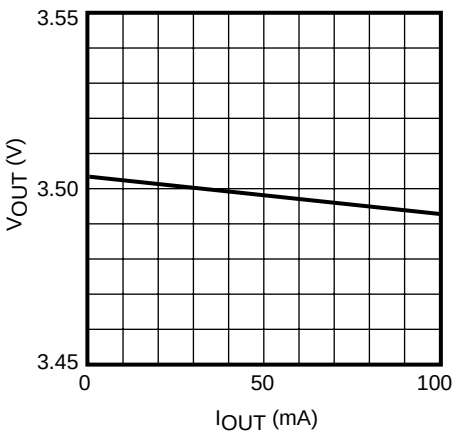

QUIESCENT CURRENT vs. INPUT VOLTAGE

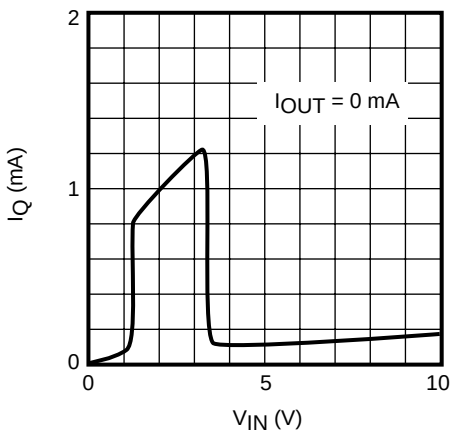

OUTPUT CURRENT vs. AMBIENT TEMPERATURE

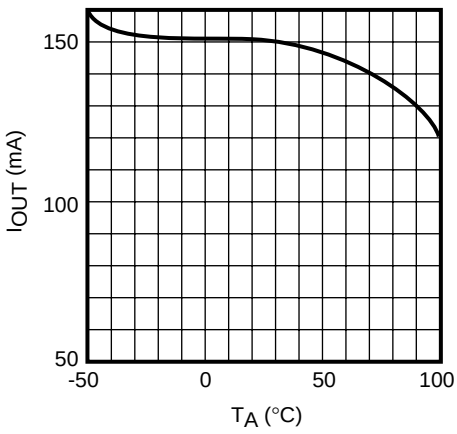

TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

T_A = 25 ° C, unless otherwise specified.

TK71335 (CONT.)

DROPOUT VOLTAGE vs. OUTPUT CURRENT

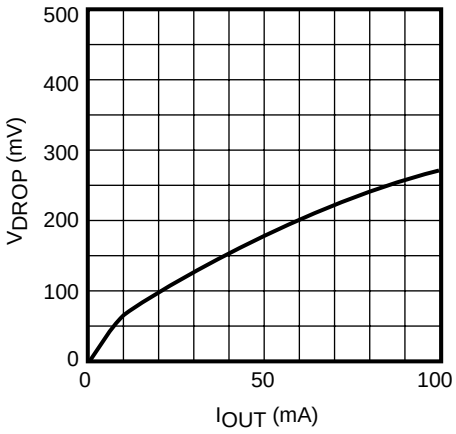

SHORT CIRCUIT PROTECTION

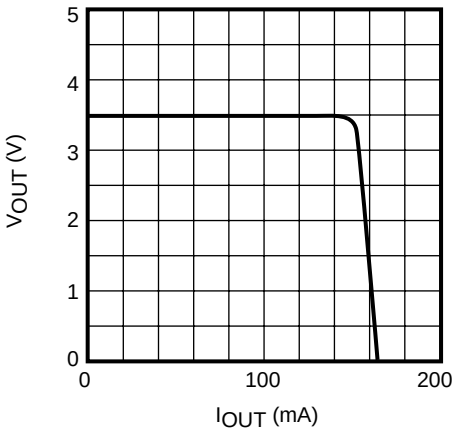

OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE

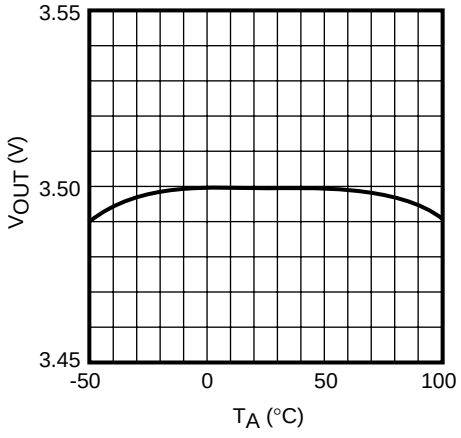

TK71340

OUTPUT VOLTAGE vs. OUTPUT CURRENT

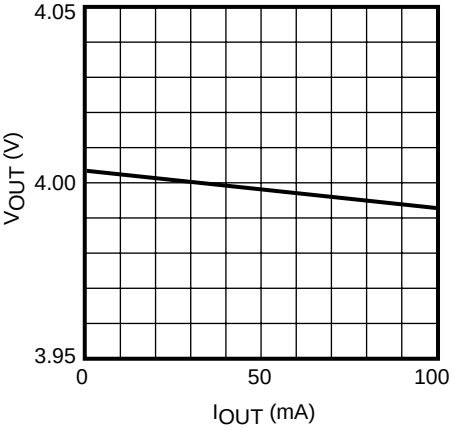

QUIESCENT CURRENT vs. INPUT VOLTAGE

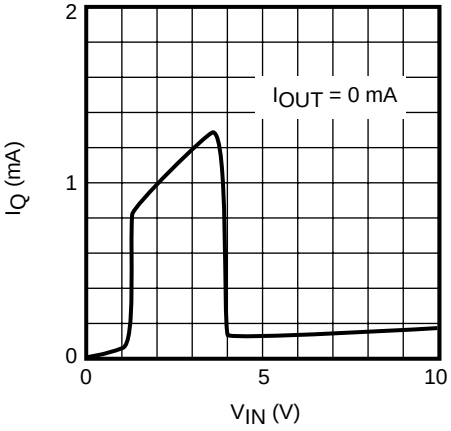

OUTPUT CURRENT vs. AMBIENT TEMPERATURE

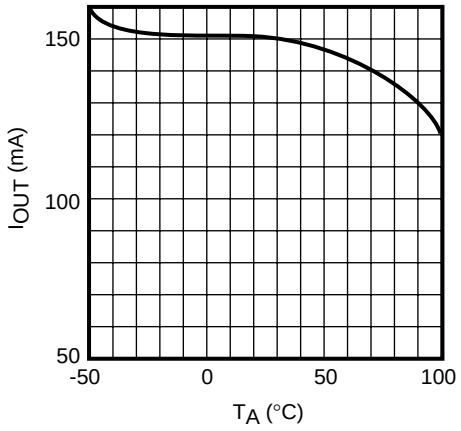

DROPOUT VOLTAGE vs. OUTPUT CURRENT

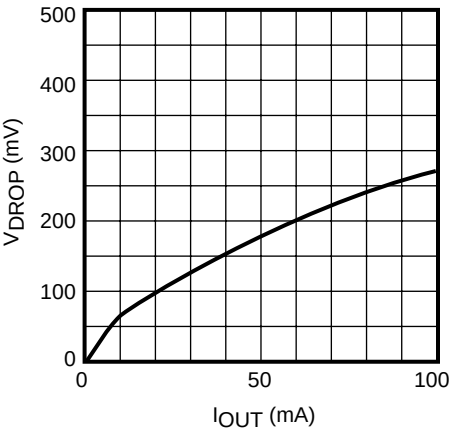

SHORT CIRCUIT PROTECTION

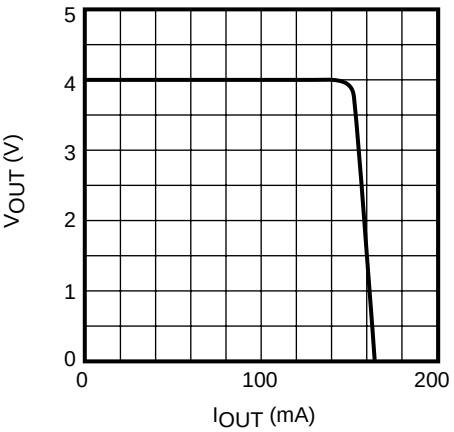

OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE

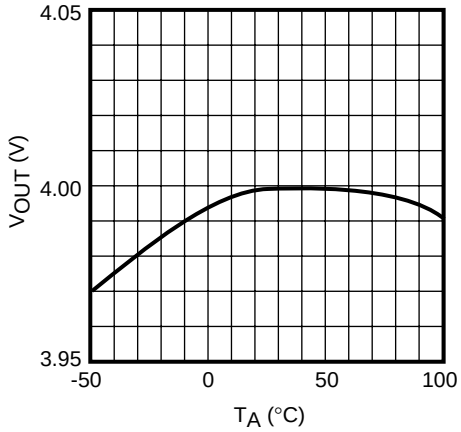

TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

T_A = 25 ° C, unless otherwise specified.

TK71345

OUTPUT VOLTAGE vs. OUTPUT CURRENT

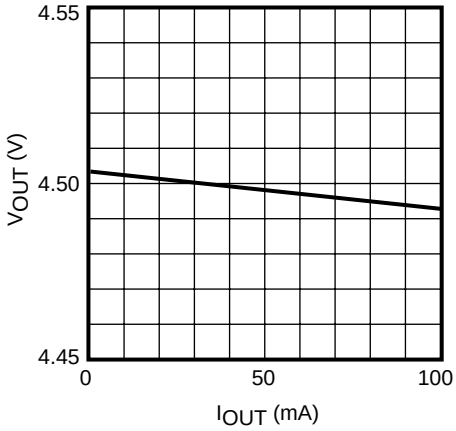

QUIESCENT CURRENT vs. INPUT VOLTAGE

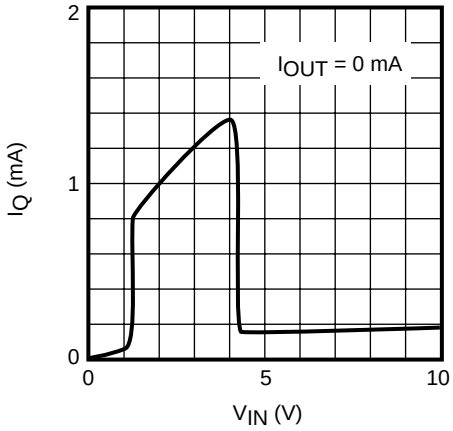

OUTPUT CURRENT vs. AMBIENT TEMPERATURE

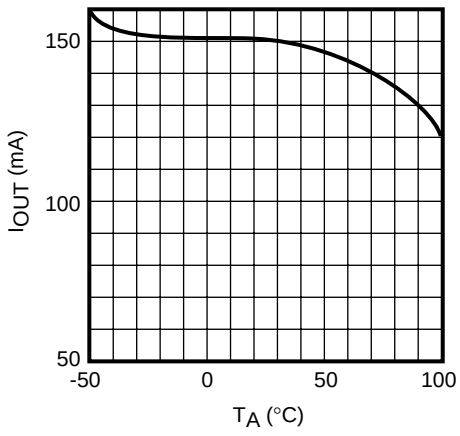

DROPOUT VOLTAGE vs. OUTPUT CURRENT

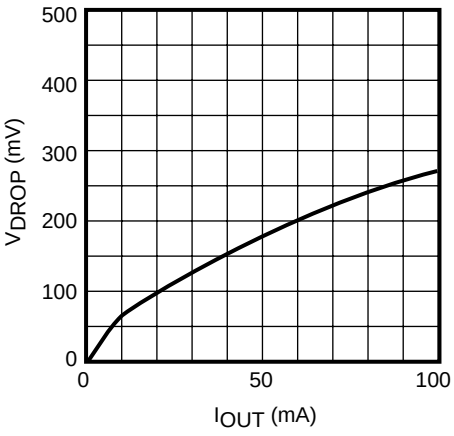

SHORT CIRCUIT PROTECTION

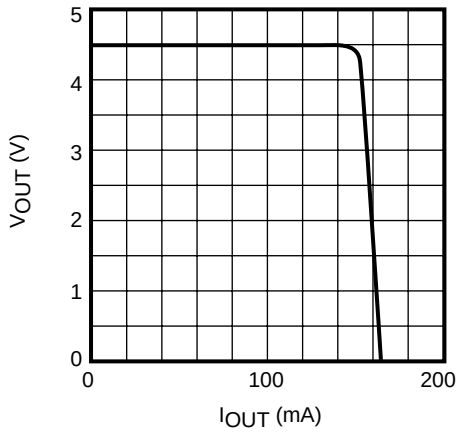

OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE

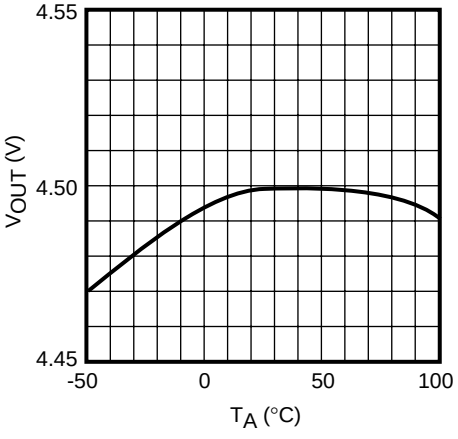

TK71350

OUTPUT VOLTAGE vs. OUTPUT CURRENT

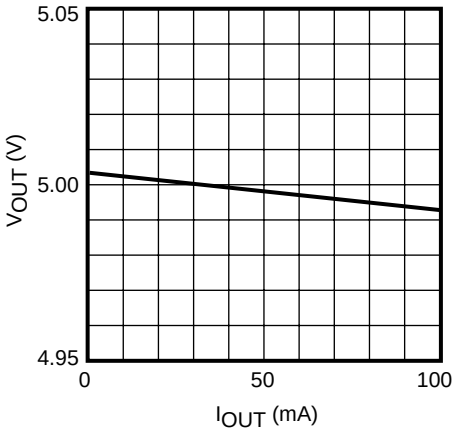

QUIESCENT CURRENT vs. INPUT VOLTAGE

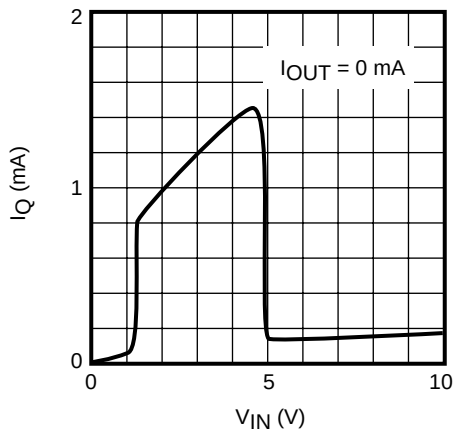

OUTPUT CURRENT vs. AMBIENT TEMPERATURE

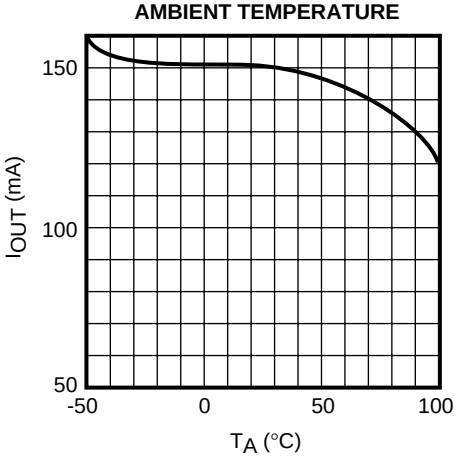

TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

T_A = 25 ° C, unless otherwise specified.

TK71350 (CONT.)

DROPOUT VOLTAGE vs. OUTPUT CURRENT

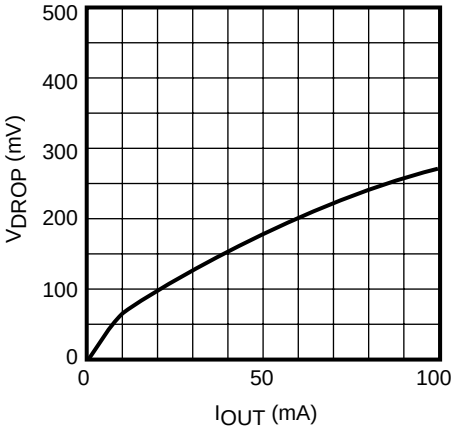

SHORT CIRCUIT PROTECTION

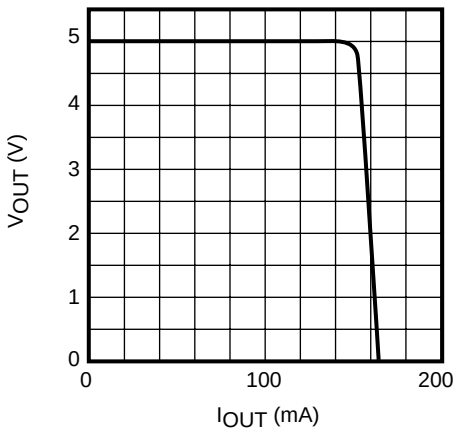

OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE

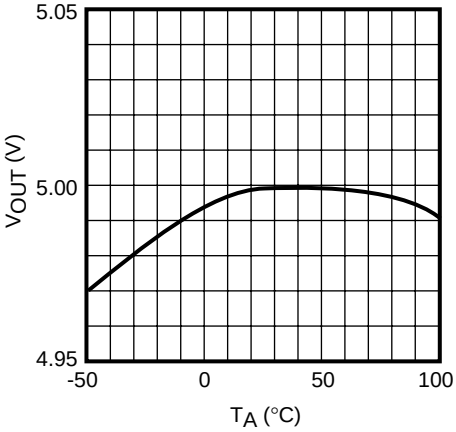

DEFINITION AND EXPLANATION OF TECHNICAL TERMS

LINE REGULATION (LINE REG)

Line regulation is the ability of the regulator to maintain a constant output voltage as the input voltage changes.

LOAD REGULATION (LOAD REG)

Load regulation is the ability of the regulator to maintain a constant output voltage as the load current changes. It is a pulsed measurement to minimize temperature effects. The load regulation is specified an output current step condition of 1 mA to 60 mA.

QUIESCENT CURRENT (I_Q)

The quiescent current is the current which flows through the ground terminal under no load conditions (I_{OUT} = 0 mA).

GROUND CURRENT (I_{GND})

Ground current is the current which flows through the ground pin(s). It is defined as I_{IN} - I_{OUT}, excluding I_{CONT}.

DROPOUT VOLTAGE (V_{DROP})

This is a measure of how well the regulator performs as the input voltage decreases. The smaller the number, the further the input voltage can decrease before regulation problems occur. Nominal output voltage is first measured when V_{IN} = V_{OUT} + 1 at a chosen load current. When the output voltage has dropped 100 mV from the nominal, V_{IN} - V_O is the dropout voltage. This voltage is affected by load current and junction temperature.

OUTPUT NOISE VOLTAGE

This is the effective AC voltage that occurs on the output voltage under the condition where the input noise is low and with a given load, filter capacitor, and frequency range.

THERMAL PROTECTION

This is an internal feature which turns the regulator off when the junction temperature rises above 150 °C. After the regulator turns off, the temperature drops and the regulator output turns back on. Under certain conditions, the output waveform may appear to be an oscillation as the output turns off and on and back again in succession.

PACKAGE POWER DISSIPATION (P_D)

This is the power dissipation level at which the thermal sensor is activated. The IC contains an internal thermal sensor which monitors the junction temperature. When the junction temperature exceeds the monitor threshold of 150 °C, the IC is shut down. The junction temperature rises as the difference between the input power (V_{IN} x I_{IN}) and the output power (V_{OUT} x I_{OUT}) increases. The rate of temperature rise is greatly affected by the mounting pad configuration on the PCB, the board material, and the ambient temperature. When the IC mounting has good thermal conductivity, the junction temperature will be low even if the power dissipation is great. When mounted on the mounting pad, the power dissipation of the SOT-25 is increased to 350 mW. For operation at ambient temperatures over 25 °C, the power dissipation of the SOT-25 device should be derated at 2.8 mW/°C. To determine the power dissipation for shutdown when mounted, attach the device on the actual PCB and deliberately increase the output current (or raise the input voltage) until the thermal protection circuit is activated. Calculate the power dissipation of the device by subtracting the output power from the input power. These measurements should allow for the ambient temperature of the PCB. The value obtained from P_D/(150 °C - T_A) is the derating factor. The PCB mounting pad should provide maximum thermal conductivity in order to maintain low device temperatures. As a general rule, the lower the temperature, the better the reliability of the device. The thermal resistance when mounted is expressed as follows:

$$T_j = \theta_{jA} \times P_D + T_A$$

For Toko ICs, the internal limit for junction temperature is 150 °C. If the ambient temperature (T_A) is 25 °C, then:

$$150\ °C = \theta_{jA} \times P_D + 25\ °C$$
$$\theta_{jA} = 125\ °C / P_D$$

P_D is the value when the thermal sensor is activated. A simple way to determine P_D is to calculate V_{IN} x I_{IN} when the output side is shorted. Input current gradually falls as temperature rises. You should use the value when thermal equilibrium is reached.

DEFINITION AND EXPLANATION OF TECHNICAL TERMS (CONT.)

The range of usable currents can also be found from the graph below.

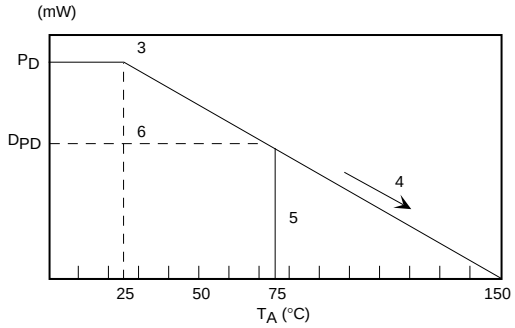

Procedure:

1) Find P_D
2) P_{D1} is taken to be P_D x (~ 0.8 - 0.9)
3) Plot P_{D1} against 25 °C
4) Connect P_{D1} to the point corresponding to the 150 °C with a straight line.
5) In design, take a vertical line from the maximum operating temperature (e.g., 75 °C) to the derating curve.
6) Read off the value of P_D against the point at which the vertical line intersects the derating curve. This is taken as the maximum power dissipation, D_{PD}.

The maximum operating current is:

$$I_{OUT} = (D_{PD} / (V_{IN(MAX)} - V_{OUT})$$

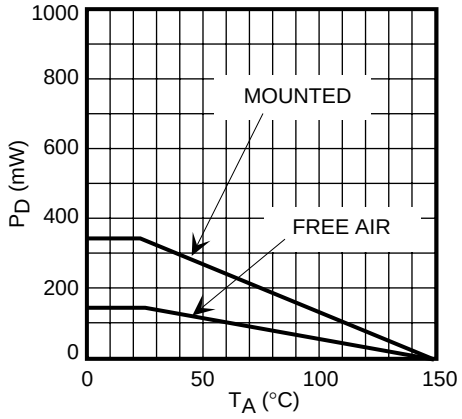

SOT-25 POWER DISSIPATION CURVE

APPLICATION INFORMATION

INPUT/OUTPUT DECOUPLING CAPACITOR CONSIDERATIONS

Voltage regulators require input and output decoupling capacitors. The required value of these capacitors vary with application. Capacitors made by different manufacturers can have different characteristics, particularly with regard to high frequencies and Equivalent Series Resistance (ESR) over temperature. The type of capacitor is also important. For example, a 4.7 µF aluminum electrolytic may be required for a certain application. If a tantalum capacitor is used, a lower value of 2.2 µF would be adequate. It is important to consider the temperature characteristics of the decoupling capacitors. While Toko regulators are designed to operate as low as -40 °C, many capacitors will not operate properly at this temperature. The capacitance of aluminum electrolytic capacitors may decrease to 0 at low temperatures. This may cause oscillation on the output of the regulator since some capacitance is required to guarantee stability. Thus, it is important to consider the characteristics of the capacitor over temperature when selecting decoupling capacitors.

The ESR is another important parameter. The ESR will increase with temperature but low ESR capacitors are often larger and more costly. In general, tantalum capacitors offer lower ESR than aluminum electrolytic, but new low ESR aluminum electrolytic capacitors are now available from several manufacturers. Usually a bench test is sufficient to determine the minimum capacitance required for a particular application. After taking thermal characteristics and tolerance into account, the minimum capacitance value should be approximately two times this value. The recommended minimum capacitance for the TK713xx is 2.2 µF for a tantalum capacitor or 3.3 µF for an aluminum electrolytic. Please note that linear regulators with a low dropout voltage have high internal loop gains which require care in guarding against oscillation caused by insufficient decoupling capacitance. The use of high quality decoupling capacitors suited for your application will guarantee proper operation of the circuit. Pay attention to temperature characteristics of the capacitor, especially the increase of ESR and decrease of capacitance in low temperatures. Oscillation, reduction of ripple rejection and increased noise may occur in some cases if the proper capacitor is not used. An output capacitor more than 1.0 µF is required to maintain stability. The standard test condition is 3.3 µF (T_A = 25 °C).

OPTIMUM PERFORMANCE

Optimum performance can only be achieved when the IC is mounted on a PC board according to the diagram below. This is because of the extremely small package and limited power dissipation. Shape the metal portion of the PCB as shown in the following drawing.

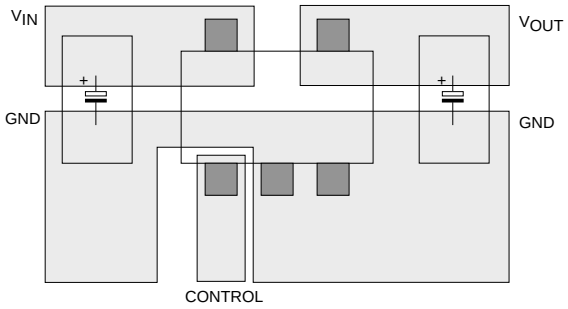

SOT-25 BOARD LAYOUT

Use a large bypass capacitor and connect it in a place near GND of the IC. Pay attention to temperature characteristics of the capacitor, especially the increase of ESR and decrease of capacitance in low temperatures. Oscillation, reduction of ripple rejection and increased noise may occur in some cases if the proper capacitor is not used. An output capacitor more than 1.0 µF is required to maintain stability. The standard test condition is 3.3 µF (T_A = 25 °C).

PACKAGE OUTLINE

SOT-25 (SOT-23-5)

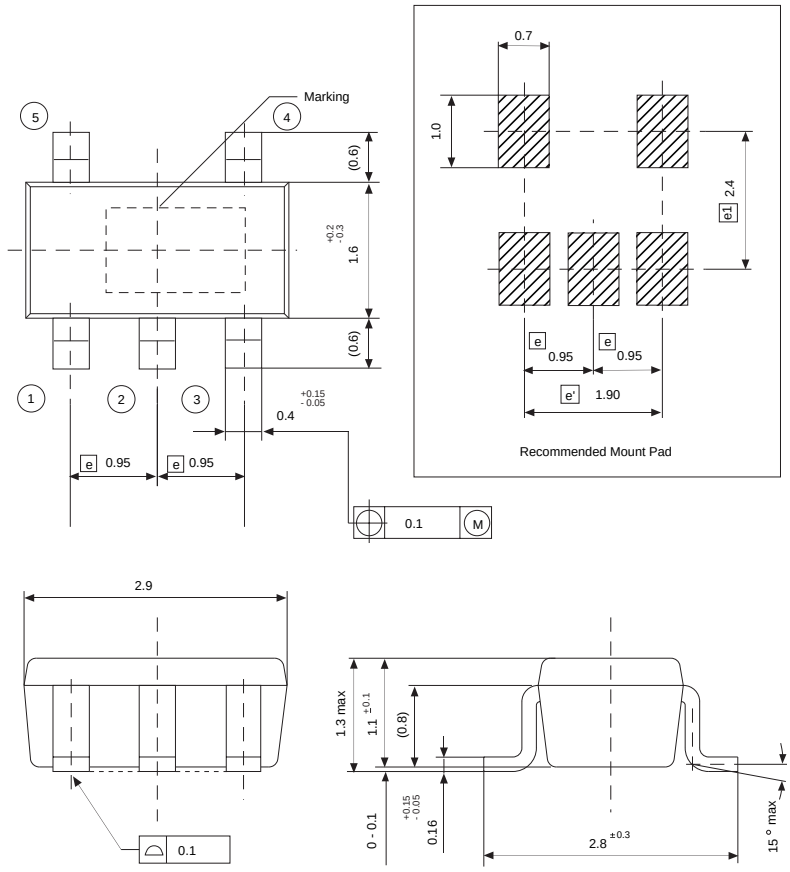

Dimensions are shown in millimeters
Tolerance: x.x = ± 0.2 mm (unless otherwise specified)

Marking Information

	Marking
TK71315	H15
TK71320	H20
TK71325	H25
TK71328	H28
TK71330	H30
TK71333	H33
TK71340	H40
TK71345	H45
TK71350	H50

TOKO

Toko America, Inc. Headquarters
1250 Feehanville Drive, Mount Prospect, Illinois 60056
Tel: (847) 297-0070 Fax: (847) 699-7864

TOKO AMERICA REGIONAL OFFICES

Midwest Regional Office
Toko America, Inc.
1250 Feehanville Drive
Mount Prospect, IL 60056
Tel: (847) 297-0070
Fax: (847) 699-7864

Western Regional Office
Toko America, Inc.
2480 North First Street , Suite 260
San Jose, CA 95131
Tel: (408) 432-8281
Fax: (408) 943-9790

Eastern Regional Office
Toko America, Inc.
107 Mill Plain Road
Danbury, CT 06811
Tel: (203) 748-6871
Fax: (203) 797-1223

Semiconductor Technical Support
Toko Design Center
4755 Forge Road
Colorado Springs, CO 80907
Tel: (719) 528-2200
Fax: (719) 528-2375

Visit our Internet site at http://www.tokoam.com

The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.

© 1999 Toko, Inc.
All Rights Reserved